



4500W
Powerful
16.15 W/In.³
Small
3kg
Light

10~500Hz,5G 10min./1cycle,period for 60min.each along X,Y,Z axes Compliance to IEC 68-2-6,IEC 68-2-64

As a new generation of industrial-grade programmable power supply, AZ4500-LV series has digital design, which makes it have ultra-high programmable accuracy, Comprehensive parameter monitoring, multi-functional analog and digital interfaces, making your power system design more accurate and efficient.

The AZ4500-LV series is designed to comply with IEC/EN62368-1, IEC60601-1, EN55032 and relevant international standards

It empowers high-end industries and medical equipment continuously.

FEATURES:

• Programmable output Voltage (0% ~ 107.5%)

• Programmable output Current (0% ~ 107.5%)

• Analog and digital interface control

• I²C, Modbus, CAN bus communication protocol Selectable

• Constant current function

• Built-in OR-ing FETs

• Selectable 5V,2A or 12V,0.83A auxiliary output

• Intelligent GUI to set and monitoring parameter



MODEL	AZ4500-30	AZ4500-36	AZ4500-48	AZ4500-60
DC Voltage Rated	30V	36V	48V	60V
Rated Current	150A	125A	93.75A	75A
Rated Power	4500W			
Ripple & Noise(Max.)	150mVp-p	150mVp-p	150mVp-p	240mVp-p
Efficiency(Typ.)	92.5%	93.0%	94.0%	94.0%
Note 1.All parameters NOT specially mentioned are measured at 230VAC input, full load,25°C of ambient temperature. 2.De-rating may apply in low input voltage. Please check the de-rating curve for more details.				

+86 755-83045928


MODEL		AZ4500-30	AZ4500-36	AZ4500-48	AZ4500-60
Output Specifications					
DC Voltage Rated	V	30V	36V	48V	60V
DC Current Rated	A	150A	125A	93.75A	75A
Programming And Readback (I ² C,RS485,CAN)					
Vout programming accuracy	--	0.3% of Vset +0.2% of rated output Voltage			
Iout programming accuracy	--	0.3% of Iset +0.2% of rated output current			
Vout programming resolution (Note.1)	--	3mV			
Iout programming resolution	--	3mA			
Vout readback accuracy	--	0.3% of actual +0.2% of rated output Voltage			
Iout readback accuracy (Note.1)	--	0.3% of actual +0.2% of rated output current			
Vout readback resolution	--	1mV			
Iout readback resolution	--	1mA			
Analog Programming And Monitoring (0~5V/0~5KΩ)					
Vout voltage programming	--	0~107.5%, 0~5V,Accuracy and linearity: ±0.5% of rated Vout.			
Iout voltage programming (Note.1)	--	0~107.5%, 0~5V ,Accuracy and linearity: ±1% of rated Iout.			
Vout resistor programming	--	0~107.5%, 0~5Kohm . Accuracy and nonlinearity: ±1% of rated Vout.			
Iout resistor programming	--	0~107.5%, 0~5Kohm .Accuracy and nonlinearity: ±1% of rated Iout.			
Output current monitor	--	0~3.3V user selectable. Accuracy: ±1%.			
Output voltage monitor	--	0~3.3V user selectable. Accuracy: ±1%.			
Constant Voltage Mode					
DC Voltage Rated	V	30V	36V	48V	60V
Programming Voltage Range	V	0~32.25	0~38.7	0~51.6	0~64.5
Ripple & Noise(P-P),Full load	mVp-p	150mVp-p	150mVp-p	150mVp-p	240mVp-p
Line Regulation (Note.2) ,Full load	--	±0.2%			
Load Regulation (Note.3)	--	±0.2%			
Remote sense compensation/wire	V	Max 2.5% of rate Vout			
Hold-up time,Full load, 100%~90%	--	16ms			
Constant Current Mode					
DC Current Rated	A	150A	125A	93.75A	75A
Programming Current Range	A	0~161.25	0~134.37	0~100.78	0~80.62
Line regulation (Note.2)	--	±0.2%			
Load regulation	--	±0.2%			
Protective &Alarm Functions					
Input Over-voltage protection	--	AC input over 275VAC shutdown, auto recovery below 260VAC; Reset by AC input or by EN Singal or by communication port.			
Input under-voltage protection	--	AC input under 85VAC shutdown, auto recovery above 90VAC			
AC fail Alarm	--	AC input voltage below 50V for 50ms			
Output Over-voltage protection	--	Shut down, Reset by AC input or by EN Singal or by communication port.			
Over temperature Alarm(OTA)	°C	Ambient temperature over 53°C; auto-recovery under 48°C			
Over temperature protection(OTP)	°C	Heat-sink temperature over 95°C,shut down and auto-recovery under 75°C			
Over current protection(OCP)	--	Constant Current Limit			
Short circuit protection(SCP)	--	shut down and auto-recovery after the short-circuit removed			
Note: 1.Ripple & noise are measured at 20MHz of bandwidth by using 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor 2.At 85~132Vac or 170~265VAC, constant load. 3.From No-Load to Full-Load, constant input voltage. Measured at the sensing point in Remote Sense.					
Function					
Local Remote control	--	By electrical Voltage: 5V/12V or dry contact			
DC-OK signal	--	Open Dragin singal, sink current ≤20mA, max drain voltage 40V			
Parallel operation	--	Possible, up to 16 units with single wire current balance connection.			
Series operation	--	Possible			
Auxiliary Power	--	Selectable +5V/2A or +12V/0.83A auxiliary output			
IOA	--	High speed I/O port (digital signal input/output)			
IOB	--	Low speed I/O port (analog singal input/output)			
Temperature measurement accuracy	°C	1			
Temperature display resolution	°C	0.1			
Note: 1.The Constant Current programming, readback and monitoring accuracy do not include the warm-up and Load regulation thermal drift.					
Input Specifications					
AC Input (Note.1)	Vac	90~264,Normal input 115VRMS/230VRMS			
DC Input	Vdc	127~370			
Input freq	HZ	47~63HZ,50/60HZ Typ 360~800,Contact factory for 400Hz application			
Input Current	--	230V/28A			
Input Fuse	A	Each line fused 40A Slow acting			
Inrush Current	A	50A,230VAC; 25°C cold start			
Note 1.Please check the de-rating curve for more details.					

Power Factor	--	0.98,230VAC,full load	
AC voltage measurement accuracy	--	$\leq \pm \text{ (Vin*1\%+0.5V) } / \text{ Vin}$	
AC voltage measurement resolution	mV	10	
AC voltage measurement refresh rate	--	2.5 Times/Sec	
AC voltage measurement range	V	80~310VAC	113~450VDC
Static Power consumption	W	$\leq 8W, 25^{\circ}C$	
Equipment class	--	Class I	
Note: 1.For cases where conformance to various safety standards (UL, IEC, etc...) is required, to be described as 100-240Vac (50/60Hz).			
Environmental Conditions			
Operating temperature	$^{\circ}C$	-25~ +70 $^{\circ}C$. Contact factory for -40 $^{\circ}C$ application	
Storage temperature	$^{\circ}C$	-40~ +85 $^{\circ}C$	
Operating humidity	%	10~90 (Relative,Non-condensing)	
Storage humidity	%	5~95 (Relative,Non-condensing)	
Operating Altitude	m	-200~3000	
Non-Operating Altitude	m	-200~5000	
vibration	--	10~500Hz,5G 10min./1cycle,period for 60min.each along X,Y,Z axes Compliance to IEC 68-2-6,IEC 68-2-64	
Shock	--	<196m/s2,With Package	
Safety/EMC			
Safety	--	Meets IEC 60601-1:2005, IEC 60601-1:2005/AMD1:2012, IEC 60601-1:2005/AMD2:2020 Meets IEC 62368-1:2018, EN 62368-1:2014/A11:2017	
EMC	--	Meets EN 60601-1-2:2015/A1:2021 IEC 60601-1-2:2014/A1:2020 EN 55032:2015/A1:2020, EN 55035:2017/A11:2020, EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3:2013/A2:2021	
Conducted emission	--	Meets EN 55032 Class B	
Radiated emission	--	Meets EN 55032 Class A	
Isolation Voltage	--	I/P-O/P: 4KVac(5656Vdc), I/P-FG: 1.5KVac (2121Vdc), O/P-FG: 0.5KVac (707Vdc)	
Insulation resistance	--	I/P-O/P,I/P-FG,O/P-FG:100M Ohms/500Vdc	
Earth Leakage Current		<300uA Normal condition, 240Vac, 63Hz, 25 $^{\circ}C$	
Mechanical			
Dimensions (WxHxD)	mm	170*63.5*280 / (6.69*2.52*11.02 inch)	
Weight	KG	3KG/PC; 9PCS/Carton, 29.5KG	
Cooling	--	Forced air cooling by internal fan	
Fan Speed	RPM	0~9000 $\pm 10\%$, Intelligent fan control	
Fan Noise Level	dB	48.7,Fan Independent testing Note.1	
Others			
Warranty		3Years,	
MTBF	h	250000.MIL-HDBK-217F@25 $^{\circ}C$	


DE-Rating Curve

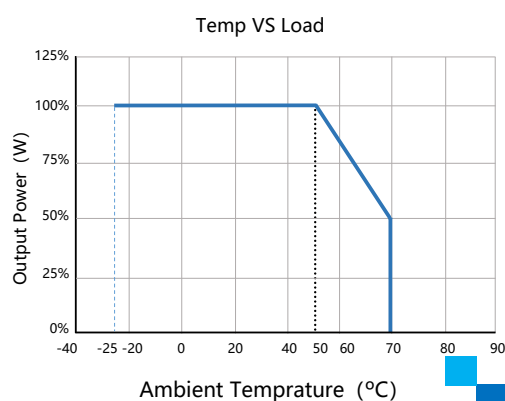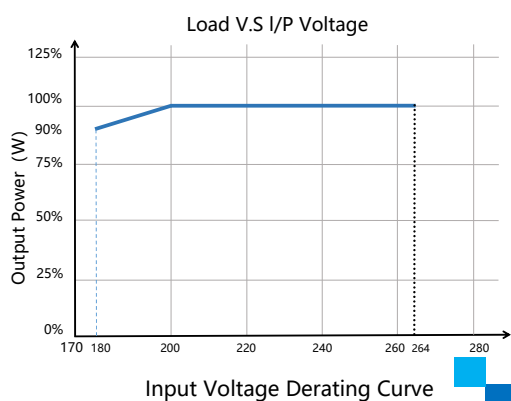

PIN Definition

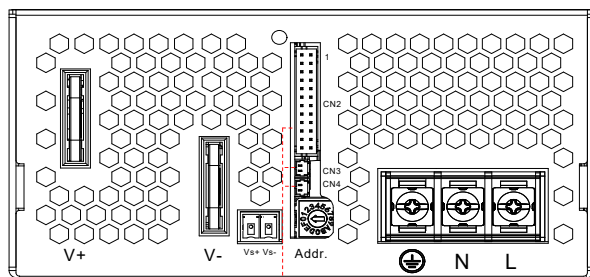


Pin	Function
L	AC Input L
N	AC Input N
$\varnothing$	AC Input FG
V+	DC Output (+)
V-	DC Output (-)
Addr	Address code




CN	Pin	Function	Description	Pin	Function	Description
CN2	2	POK	Power OK	1	VSET	Aux output setting 5V/12V
	4	GND	Ground	3	AUX	Auxiliary output positive
	6	GND	Ground	5	AUX	Auxiliary output positive
	8	EN+	Inhibit ON/OFF (+)	7	AUX	Auxiliary output positive
	10	GND	Ground	9	EN-	Inhibit ON/OFF (-)
	12	GND	Ground	11	ACI	I Program
	14	GND	Ground	13	VCI	V Program
	16	SCL	Serial Clock Line	15	SDA	Serial Data Line
	18	IOB	Low speed I/O port	17	IOA	High speed I/O port
	20	CAN-L	Controller Area Network-L	19	CAN-H	Controller Area Network-H
	22	GNDI	Isolation 5V Ground	21	+5VC	Isolation 5V positive
	24	485_B-	RS485_B-	23	485_A+	RS485_A+
Signal Connector		JST PHDR-24VS or equivalent; JST SPHD-002T-P0.5 or equivalent				
CN3/CN4	1	PAR	Parallel operation current share			
	2	GND	Ground			
Signal Connector		CJT A1251H-2P or equivalent; CJT A1251-TP or equivalent				
VS +		Remote sense(+)				
VS -		Remote sense(-)				
Signal Connector		Phoenix Contact MC 1.5/ 2-ST-3.81 Order No.: 1803578 or equivalent				


Remote ON/OFF



(a) Using internal 5V auxiliary source (Default Setting)



(b) Using external voltage source




(c) ON / OFF Control by NPN transistor


Note:

GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power(V-).


Output Voltage/Current Programming

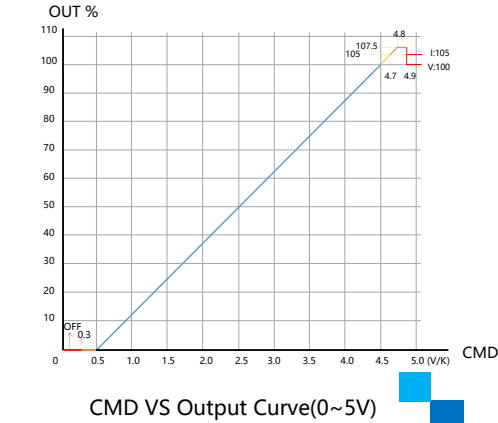




CMD VS Output Curve(0~5V)

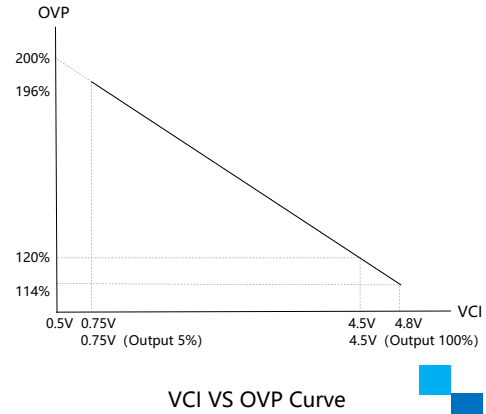


VCI VS OVP Curve

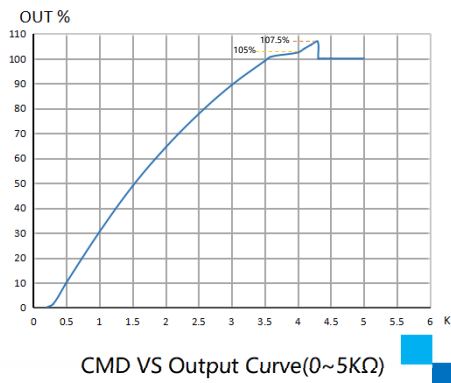

CMD VS Output Curve(0~5KΩ)

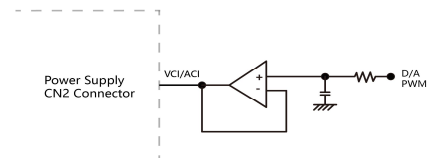

Power OK Signal & Auxiliary Power Setting

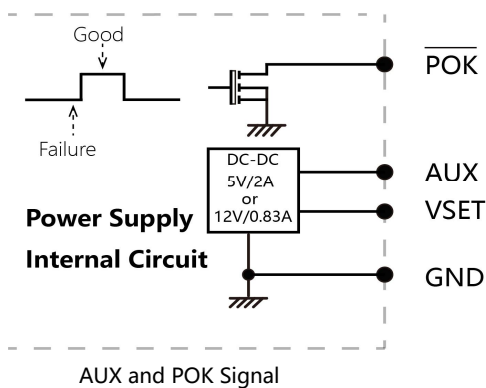


AUX and POK Signal

The grounding of "AUX" power and P.OK signal should be connected to "GND" port. If "V-" is connected as Grounding, make sure to short the GND and V- ports.

Note:
GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power(V-).




Do not exceed 5V/2A or 12V/0.83A

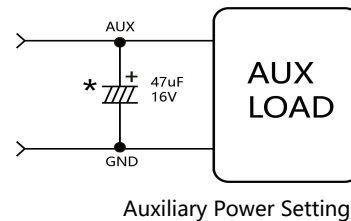


Auxiliary Power Setting

*Place an additional capacitor to have a better performance of auxiliary power operation.

LED status indication

mode	Description	LED Signal	LED Slow=750ms; Fast=250ms
Local mode	Power Standby		Slow Blink (Green)
	Power OK		Solid (Green)
Remote mode	Power Standby		Slow Blink (Orange)
	Power OK		Solid (Orange)
Local/Remote mode	AC Failure		Alternating flicker (Red&Green)
	FAN Failure		
	OTA		
	AC Input Over /Under Voltage Protection		Fast Blink (Red)
	BUS Over Voltage Protection (OVP)		Intermittent Blink (Red)
	Over Load Protection (OLP)		Interlace Blink (Red)
	Over Temperature Protection (OTP)		Slow Blink (Red)
	DC Output Over Voltage Protection (OVP)		Solid (Red)


Mechanical Drawings

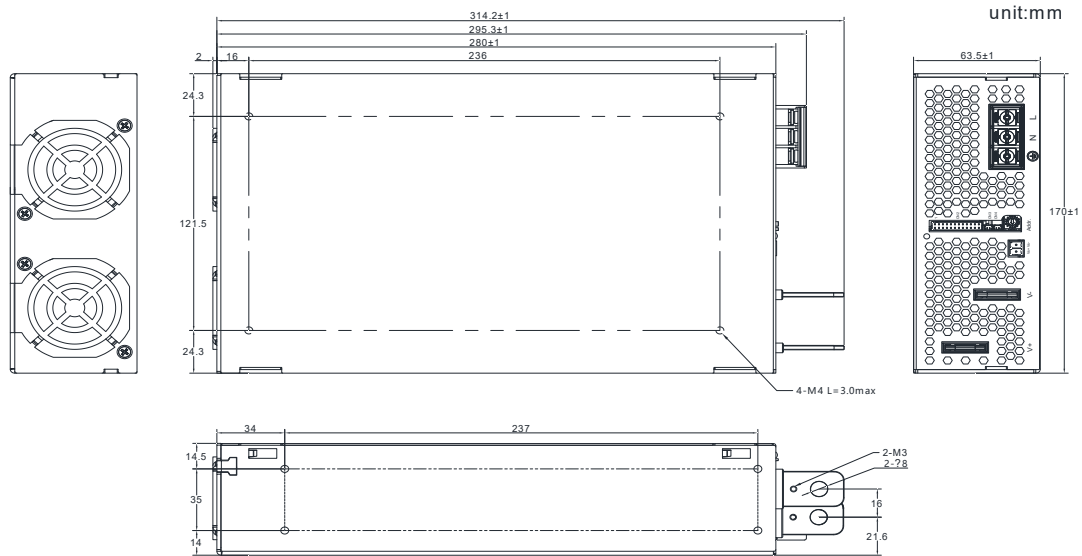

Notes:

- 1, Input: terminal block type. M4 screw torque value of 16kgf-cm using wire gauge 18-10 (13mm centers)
- 2, Output terminal block, M8 screw in 2 positions, torque 2.4 Nm (21.24 lb-in)


Installation precautions

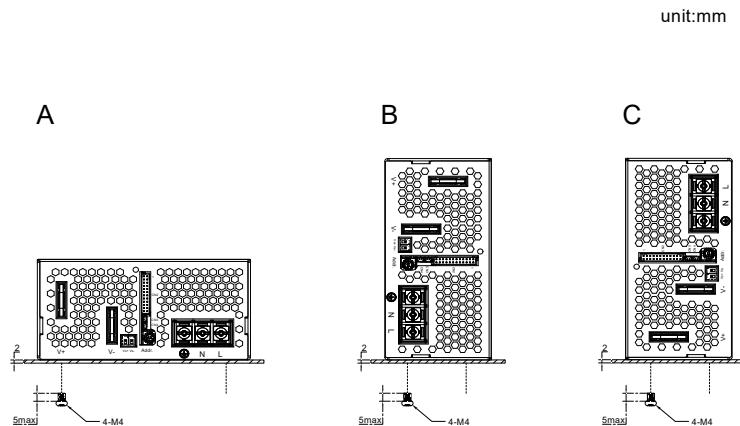

Notes:

- 1, Recommended standard mounting methods A, B, C
- 2, The Maximum allowable penetration of screw is 4mm. Incomplete threading should not be penetrated

Installation precautions

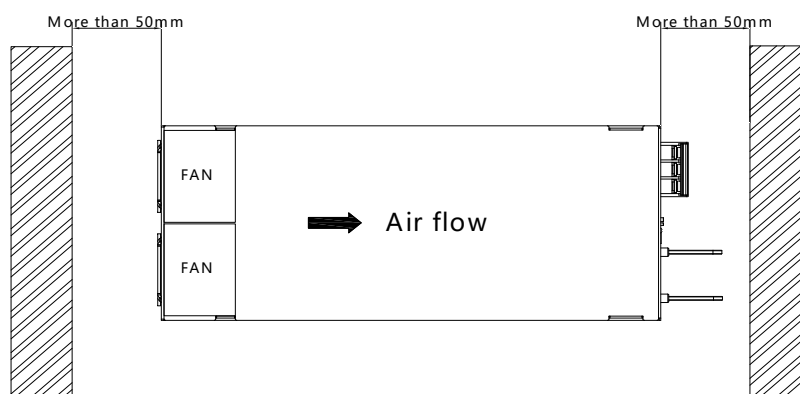

Notes:
There are ventilating holes on the front and back side panels, do not obstruct; allow 50mm at least for air flow.